



| | | | | | |
|----------------------|---------|--------------------|---------|--------------------|----------|
| Oil Pattern Distance | 44 | Reverse Brush Drop | 30 | Oil Per Board | 50 ul |
| Forward Oil Total | 20.7 mL | Reverse Oil Total | 9.25 mL | Volume Oil Total | 29.95 mL |
| Tank Configuration | A Only | Tank A Conditioner | Fire | Tank B Conditioner | Ice |

| | START | STOP | LOADS | SPEED | BUFFER | TANK | CROSSED | START | END | FEET | T.OIL |
|---|-------|------|-------|-------|--------|------|---------|-------|------|------|-------|
| 1 | 2L | 2R | 3 | 10 | 3 | A | 111 | 0.0 | 2.8 | 2.8 | 5550 |
| 2 | 11L | 11R | 1 | 10 | 3 | A | 19 | 2.8 | 4.2 | 1.4 | 950 |
| 3 | 11L | 11R | 2 | 22 | 3 | A | 38 | 4.2 | 10.4 | 6.2 | 1900 |
| 4 | 6L | 6R | 5 | 22 | 3 | A | 145 | 10.4 | 25.9 | 15.5 | 7250 |
| 5 | 12L | 12R | 4 | 18 | 3 | A | 68 | 25.9 | 36.1 | 10.2 | 3400 |
| 6 | 15L | 15R | 3 | 18 | 3 | A | 33 | 36.1 | 43.7 | 7.6 | 1650 |
| 7 | 2L | 2R | 0 | 18 | 3 | A | 0 | 43.7 | 44.0 | 0.3 | 0 |

| | START | STOP | LOADS | SPEED | BUFFER | TANK | CROSSED | START | END | FEET | T.OIL |
|---|-------|------|-------|-------|--------|------|---------|-------|------|-------|-------|
| 1 | 2L | 2R | 0 | 10 | 3 | A | 0 | 44.0 | 20.0 | -24.0 | 0 |
| 2 | 2L | 2R | 5 | 26 | 3 | A | 185 | 20.0 | 1.6 | -18.4 | 9250 |
| 3 | 2L | 2R | 0 | 10 | 3 | A | 0 | 1.6 | 0.0 | -1.6 | 0 |

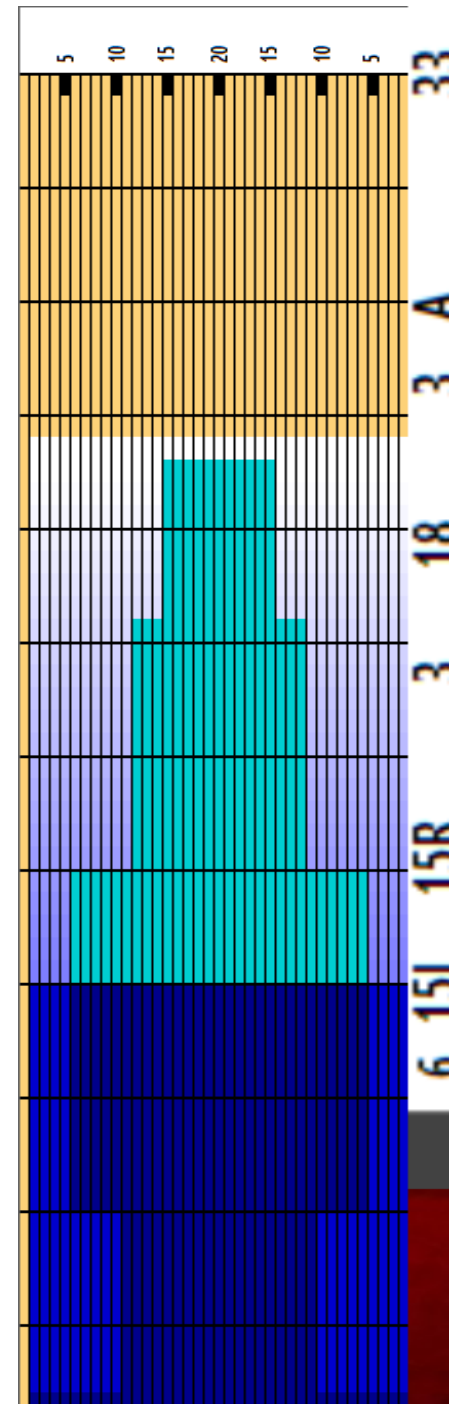

Cleaner Ratio Main Mix 5:1 Forward
 Cleaner Ratio Back End Mix 5:1 Reverse
 Cleaner Ratio Back End Distance 59 Combined
 Buffer RPM: 4 = 700 | 3 = 500 | 2 = 200 | 1 = 100



| Item | 3L-7L:18L-18R | 8L-12L:18L-18R | 13L-17L:18L-18R | 18L-18R:17R-13R | 18L-18R:12R-8R | 18L-18R:7R-3R |
|------------------|----------------|----------------|-----------------|-----------------|----------------|----------------|
| Description | Outside:Middle | Middle:Middle | Inside:Middle | Middle: Inside | Middle:Middle | Middle:Outside |
| Track Zone Ratio | 2.3 | 1.53 | 1.06 | 1.06 | 1.53 | 2.3 |

