


Oil Pattern Distance	44	Reverse Brush Drop	42	Oil Per Board	50 ul
Forward Oil Total	15.8 mL	Reverse Oil Total	9.75 mL	Volume Oil Total	25.55 mL
Tank Configuration	Only A	Tank A Conditioner	N/A	Tank B Conditioner	N/A

	START	STOP	LOADS	SPEED	CROSSED	START	END	FEET	T.OIL
1	4L	4R	6	14	198	0.0	9.9	9.9	9900
2	11L	11R	2	22	38	9.9	16.1	6.2	1900
3	13L	13R	2	22	30	16.1	22.3	6.2	1500
4	13L	13R	1	22	15	22.3	25.4	3.1	750
5	14L	14R	1	22	13	25.4	28.5	3.1	650
6	15L	15R	2	26	22	28.5	35.8	7.3	1100
7	2L	2R	0	26	0	35.8	44.0	8.2	0

	START	STOP	LOADS	SPEED	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	26	0	44.0	34.0	-10.0	0
2	17L	17R	2	22	14	34.0	27.8	-6.2	700
3	15L	15R	2	18	22	27.8	22.7	-5.1	1100
4	14L	14R	2	18	26	22.7	17.6	-5.1	1300
5	12L	12R	2	18	34	17.6	12.5	-5.1	1700
6	4L	4R	3	18	99	12.5	4.9	-7.6	4950
7	2L	2R	0	14	0	4.9	0.0	-4.9	0

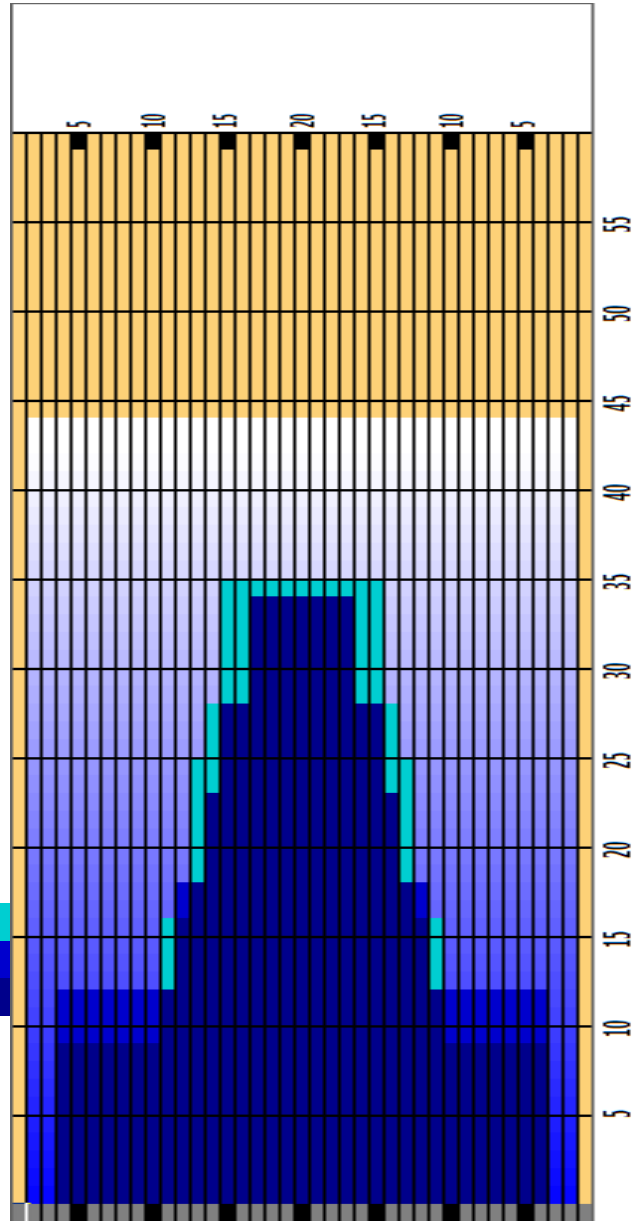

Cleaner Ratio Main Mix NA Forward
 Cleaner Ratio Back End Mix NA Reverse
 Cleaner Ratio Back End Distance NA Combined

Buffer RPM: 4 = 720 | 3 = 500 | 2 = 200 | 1 = 50
 Created by SWEBOWLK TK(HJ) 230808. Machines without db uses db 44. For use in Swedish league 2023->

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside Track:Middle	Middle Track:Middle	Inside Track:Middle	Middle:Inside Track	Middle:Middle Track	Middle:Outside Track
Track Zone Ratio	3.47	2.45	1.18	1.18	2.45	3.47

