


Oil Pattern Distance	43	Reverse Brush Drop	35	Oil Per Board	50 ul
Forward Oil Total	14.4 mL	Reverse Oil Total	10.15 mL	Volume Oil Total	24.55 mL
Tank Configuration	Only A	Tank A Conditioner		Tank B Conditioner	

	START	STOP	LOADS	SPEED	CROSSED	START	END	FEET	T.OIL
1	2L	2R	4	18	148	0.0	7.6	7.6	7400
2	7L	7R	3	18	81	7.6	15.2	7.6	4050
3	10L	10R	2	18	42	15.2	20.3	5.1	2100
4	12L	12R	1	18	17	20.3	22.8	2.5	850
5	2L	2R	0	22	0	22.8	34.0	11.2	0
6	2L	2R	0	26	0	34.0	43.0	9.0	0

	START	STOP	LOADS	SPEED	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	26	0	43.0	33.0	-10.0	0
2	12L	10R	3	18	57	33.0	25.4	-7.6	2850
3	11L	9R	3	18	63	25.4	17.8	-7.6	3150
4	10L	8R	2	18	46	17.8	12.7	-5.1	2300
5	2L	2R	1	14	37	12.7	10.8	-1.9	1850
6	2L	2R	0	14	0	10.8	0.0	-10.8	0

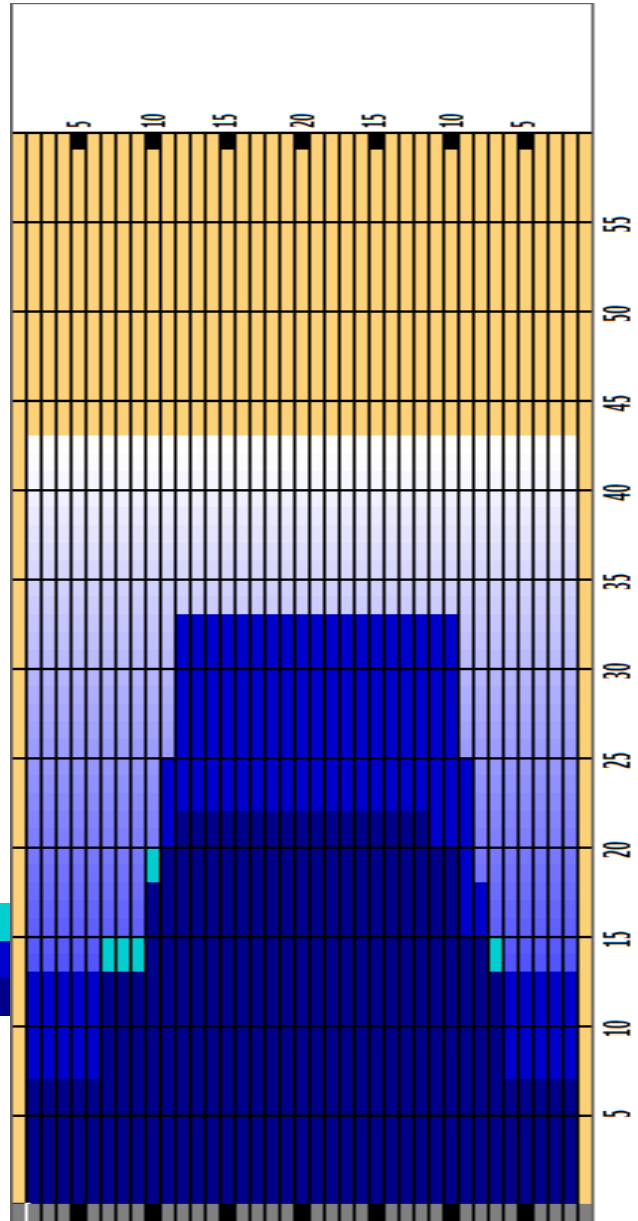

Cleaner Ratio Main Mix                    NA            Forward  
 Cleaner Ratio Back End Mix            NA            Reverse  
 Cleaner Ratio Back End Distance      NA            Combined  
 Buffer RPM: 4 = 720 | 3 = 500 | 2 = 200 | 1 = 50  
 Created by SWEBOWL TK 220508

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside Track:Middle	Middle Track:Middle	Inside Track:Middle	Middle:Inside Track	Middle:Middle Track	Middle:Outside Track
Track Zone Ratio	3.39	1.53	1	1	1.22	3.39

