


Oil Pattern Distance	42	Reverse Brush Drop	37	Oil Per Board	50 ul
Forward Oil Total	16.85 mL	Reverse Oil Total	11.25 mL	Volume Oil Total	28.1 mL
Tank Configuration	Only A	Tank A Conditioner	N/A	Tank B Conditioner	N/A

	START	STOP	LOADS	SPEED	CROSSED	START	END	FEET	T.OIL
1	2L	2R	3	18	111	0.0	5.1	5.1	5550
2	6L	6R	2	18	58	5.1	10.2	5.1	2900
3	7L	7R	2	18	54	10.2	15.3	5.1	2700
4	9L	9R	2	22	46	15.3	21.5	6.2	2300
5	11L	11R	2	22	38	21.5	27.7	6.2	1900
6	13L	13R	2	26	30	27.7	35.0	7.3	1500
7	2L	2R	0	30	0	35.0	42.0	7.0	0

	START	STOP	LOADS	SPEED	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	26	0	42.0	32.0	-10.0	0
2	12L	12R	3	22	51	32.0	22.7	-9.3	2550
3	10L	10R	2	18	42	22.7	17.6	-5.1	2100
4	6L	6R	2	18	58	17.6	12.5	-5.1	2900
5	2L	2R	2	18	74	12.5	7.4	-5.1	3700
6	2L	2R	0	18	0	7.4	0.0	-7.4	0

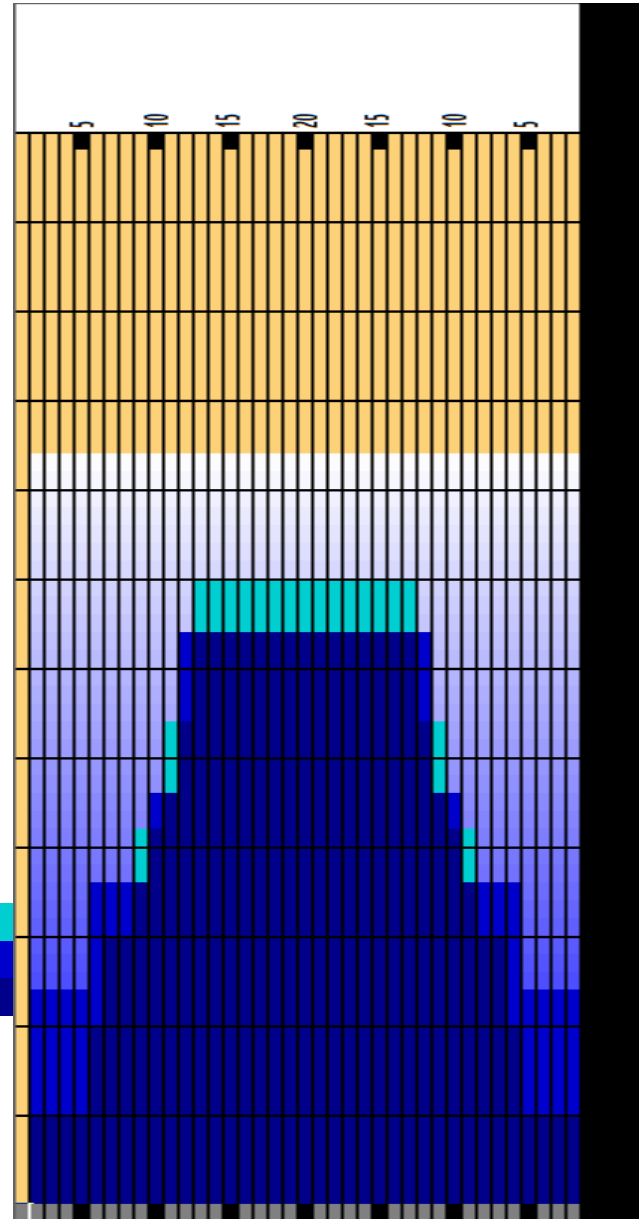

Cleaner Ratio Main Mix                      NA              Forward  
 Cleaner Ratio Back End Mix                NA              Reverse  
 Cleaner Ratio Back End Distance         NA              Combined  
 Buffer RPM: 4 = 720 | 3 = 500 | 2 = 200 | 1 = 50  
 Created by SWEBOWL TK 20260315

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside Track:Middle	Middle Track:Middle	Inside Track:Middle	Middle: Inside Track	Middle:Middle Track	Middle:Outside Track
Track Zone Ratio	3.14	1.45	1	1	1.45	3.14

