


Oil Pattern Distance	43	Reverse Brush Drop	41	Oil Per Board	50 ul
Forward Oil Total	17.3 mL	Reverse Oil Total	9.9 mL	Volume Oil Total	27.2 mL
Tank Configuration	Only A	Tank A Conditioner	Your choice	Tank B Conditioner	Your choice

	START	STOP	LOADS	SPEED	CROSSED	START	END	FEET	T.OIL
1	2L	2R	5	14	185	0.0	7.9	9250	
2	9L	9R	1	18	23	7.9	10.4	2.5	1150
3	11L	11R	1	18	19	10.4	12.9	2.5	950
4	12L	12R	1	22	17	12.9	16.0	3.1	850
5	2L	2R	1	22	37	16.0	19.1	3.1	1850
6	13L	13R	1	22	15	19.1	22.2	3.1	750
7	14L	14R	1	26	13	22.2	25.8	3.6	650
8	2L	2R	1	26	37	25.8	29.4	3.6	1850
9	2L	2R	0	26	0	29.4	43.0	13.6	0

	START	STOP	LOADS	SPEED	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	26	0	43.0	35.0	-8.0	0
2	14L	14R	2	26	26	35.0	27.7	-7.3	1300
3	13L	13R	2	22	30	27.7	21.5	-6.2	1500
4	12L	12R	1	22	17	21.5	18.4	-3.1	850
5	10L	10R	2	22	42	18.4	12.2	-6.2	2100
6	9L	9R	2	22	46	12.2	6.0	-6.2	2300
7	2L	2R	1	10	37	6.0	4.6	-1.4	1850
8	2L	2R	0	10	0	4.6	0.0	-4.6	0

Cleaner Ratio Main Mix NA Forward
 Cleaner Ratio Back End Mix NA Reverse
 Cleaner Ratio Back End Distance NA Combined
 Buffer RPM: 4 = 720 | 3 = 500 | 2 = 200 | 1 = 50
 Created by SWEBOWL TK 240702. For use in
 Swedish league 2024-25. Machines without db, uses
 db 43.

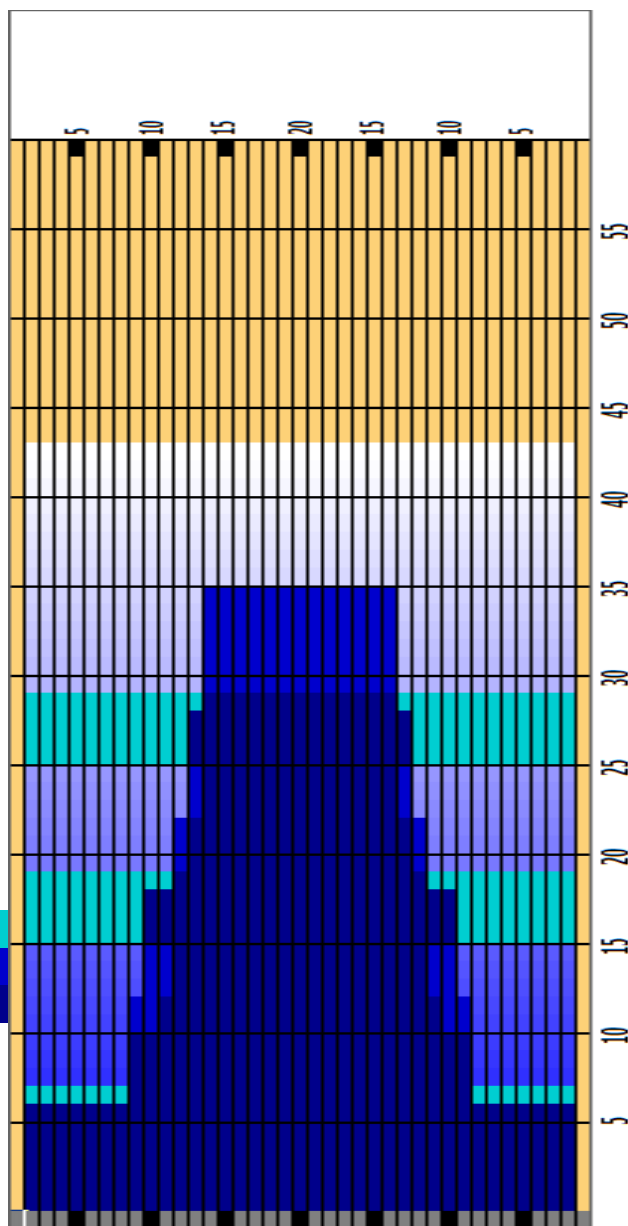

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside Track:Middle	Middle Track:Middle	Inside Track:Middle	Middle: Inside Track	Middle:Middle Track	Middle:Outside Track
Track Zone Ratio	2.75	1.77	1.03	1.03	1.77	2.75

