


Oil Pattern Distance	41	Reverse Brush Drop	38	Oil Per Board	50 ul
Forward Oil Total	18.4 mL	Reverse Oil Total	5 mL	Volume Oil Total	23.4 mL
Tank Configuration	Only A	Tank A Conditioner		Tank B Conditioner	

	START	STOP	LOADS	SPEED	CROSSED	START	END	FEET	T.OIL
1	2L	2R	5	14	185	0.0	7.9	7.9	9250
2	7L	7R	1	14	27	7.9	9.8	1.9	1350
3	8L	8R	1	14	25	9.8	11.7	1.9	1250
4	9L	9R	2	14	46	11.7	15.6	3.9	2300
5	10L	10R	1	14	21	15.6	17.5	1.9	1050
6	11L	11R	1	14	19	17.5	19.4	1.9	950
7	12L	12R	1	18	17	19.4	21.9	2.5	850
8	13L	13R	1	18	15	21.9	24.4	2.5	750
9	14L	14R	1	18	13	24.4	26.9	2.5	650
10	2L	2R	0	18	0	26.9	38.0	11.1	0
11	2L	2R	0	22	0	38.0	41.0	3.0	0

	START	STOP	LOADS	SPEED	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	30	0	41.0	26.0	-15.0	0
2	12L	12R	1	26	17	26.0	22.4	-3.6	850
3	10L	10R	1	26	21	22.4	18.8	-3.6	1050
4	8L	8R	1	26	25	18.8	15.2	-3.6	1250
5	2L	2R	1	26	37	15.2	11.6	-3.6	1850
6	2L	2R	0	14	0	11.6	0.0	-11.6	0

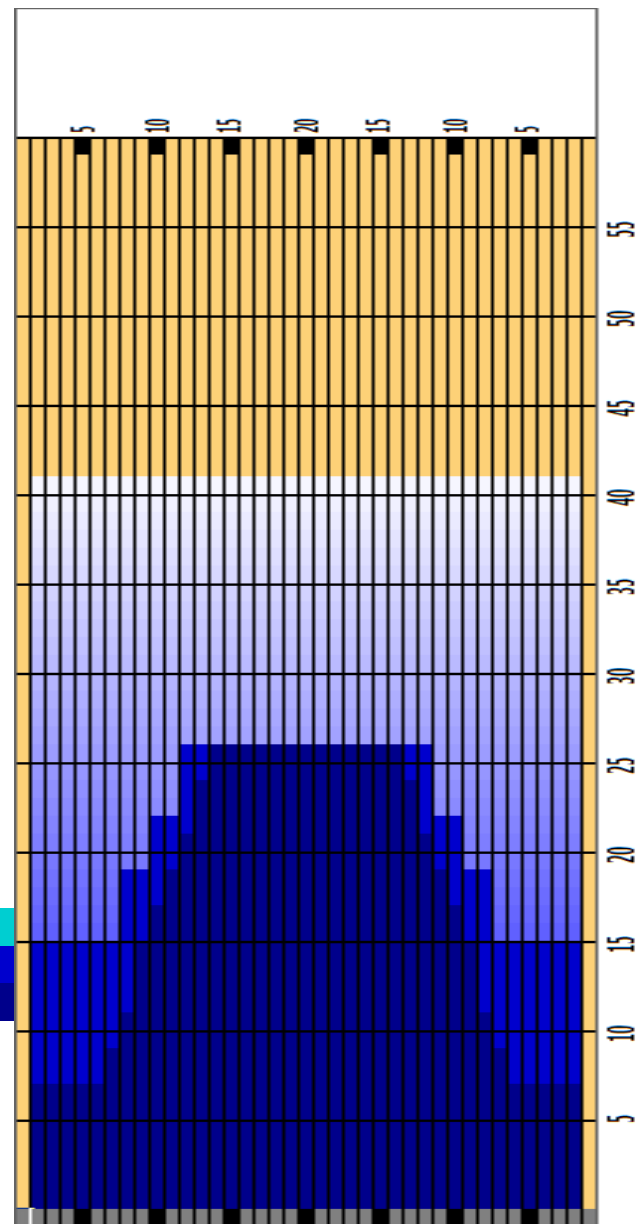

Cleaner Ratio Main Mix                      NA              Forward  
 Cleaner Ratio Back End Mix                NA              Reverse  
 Cleaner Ratio Back End Distance         NA              Combined

Buffer RPM: 4 = 720 | 3 = 500 | 2 = 200 | 1 = 50  
 Created by SWEBOWL TK (W) 230616 Machines  
 without DB use DB 41. For use in Swedish league  
 2023->

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside Track:Middle	Middle Track:Middle	Inside Track:Middle	Middle:Inside Track	Middle:Middle Track	Middle:Outside Track
Track Zone Ratio	2,9	1,43	1,01	1,01	1,43	2,9

