


Oil Pattern Distance	40	Reverse Brush Drop	37	Oil Per Board	50 ul
Forward Oil Total	12.6 mL	Reverse Oil Total	9.9 mL	Volume Oil Total	22.5 mL
Tank Configuration	Only A	Tank A Conditioner		Tank B Conditioner	

	START	STOP	LOADS	MICS	SPEED	CROSSED	START	END	FEET	T.OIL
1	2L	2R	3	50	10	111	0.0	2.8	2.8	5550
2	6L	6R	1	50	10	29	2.8	4.2	1.4	1450
3	9L	9R	1	50	14	23	4.2	6.1	1.9	1150
4	10L	10R	2	50	14	42	6.1	10.0	3.9	2100
5	12L	12R	2	50	14	34	10.0	13.9	3.9	1700
6	14L	14R	1	50	18	13	13.9	16.4	2.5	650
7	2L	2R	0	50	18	0	16.4	26.0	9.6	0
8	2L	2R	0	50	26	0	26.0	33.0	7.0	0
9	2L	2R	0	50	30	0	33.0	40.0	7.0	0

	START	STOP	LOADS	MICS	SPEED	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	50	26	0	40.0	37.0	-3.0	0
2	14L	14R	1	50	18	13	37.0	34.5	-2.5	650
3	13L	13R	1	50	14	15	34.5	32.6	-1.9	750
4	10L	10R	2	50	14	42	32.6	28.7	-3.9	2100
5	8L	8R	1	50	10	25	28.7	27.3	-1.4	1250
6	6L	6R	1	50	10	29	27.3	25.9	-1.4	1450
7	2L	2R	2	50	10	74	25.9	23.1	-2.8	3700
8	2L	2R	0	50	10	0	23.1	0.0	-23.1	0

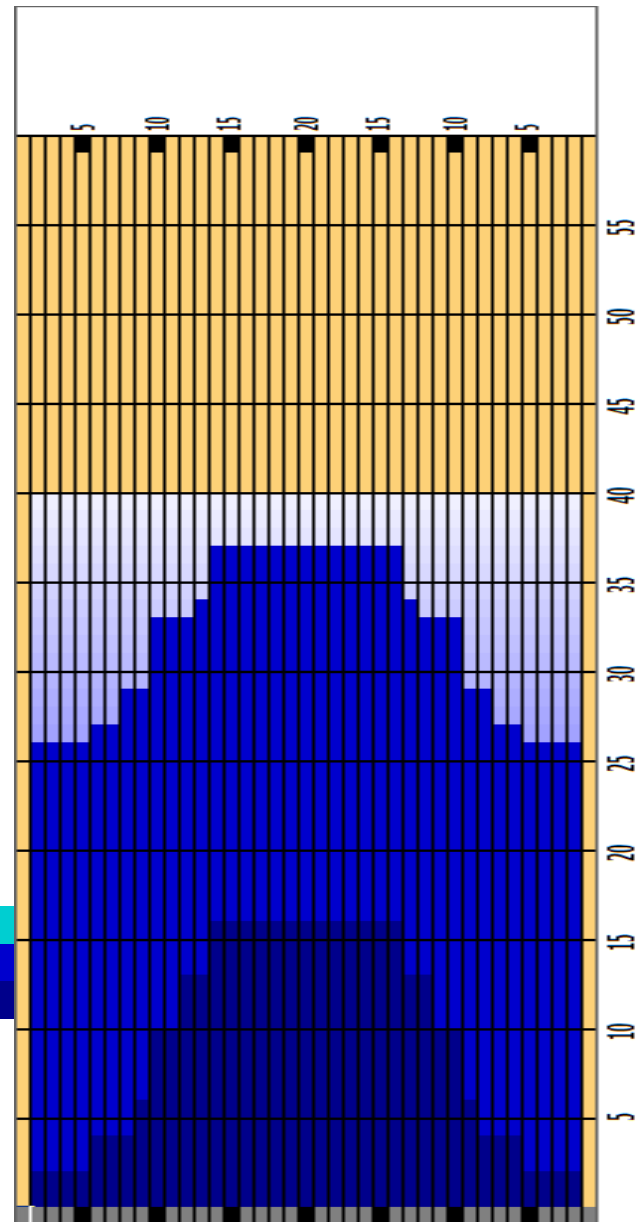

Cleaner Ratio Main Mix                      NA              Forward  
 Cleaner Ratio Back End Mix                NA              Reverse  
 Cleaner Ratio Back End Distance         NA              Combined

Buffer RPM: 4 = 720 | 3 = 500 | 2 = 200 | 1 = 50

Created by SWEBOWL TK 230615(W)Machines  
 without DB use DB 38.For use in Swedish league  
 2023 ->2025

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside Track:Middle	Middle Track:Middle	Inside Track:Middle	Middle:Inside Track	Middle:Middle Track	Middle:Outside Track
Track Zone Ratio	3.1	1.55	1.02	1.02	1.55	3.1

