


Oil Pattern Distance	42	Reverse Brush Drop	38	Oil Per Board	50 ul
Forward Oil Total	14.35 mL	Reverse Oil Total	10.75 mL	Volume Oil Total	25.1 mL
Tank Configuration	Only A	Tank A Conditioner	Your choice	Tank B Conditioner	Your choice

	START	STOP	LOADS	SPEED	CROSSED	START	END	FEET	T.OIL
1	2L	2R	3	14	111	0.0	3.9	3.9	5550
2	9L	9R	2	18	46	3.9	9.0	5.1	2300
3	11L	11R	2	18	38	9.0	14.1	5.1	1900
4	12L	12R	2	22	34	14.1	20.3	6.2	1700
5	13L	13R	3	22	45	20.3	29.6	9.3	2250
6	14L	14R	1	26	13	29.6	33.2	3.6	650
7	2L	2R	0	26	0	33.2	35.0	1.8	0
8	2L	2R	0	30	0	35.0	42.0	7.0	0

	START	STOP	LOADS	SPEED	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	26	0	42.0	35.0	-7.0	0
2	14L	14R	2	26	26	35.0	27.7	-7.3	1300
3	13L	13R	2	22	30	27.7	21.5	-6.2	1500
4	12L	12R	2	22	34	21.5	15.3	-6.2	1700
5	10L	10R	2	18	42	15.3	10.2	-5.1	2100
6	9L	9R	2	14	46	10.2	6.3	-3.9	2300
7	2L	2R	1	10	37	6.3	4.9	-1.4	1850
8	2L	2R	0	10	0	4.9	0.0	-4.9	0

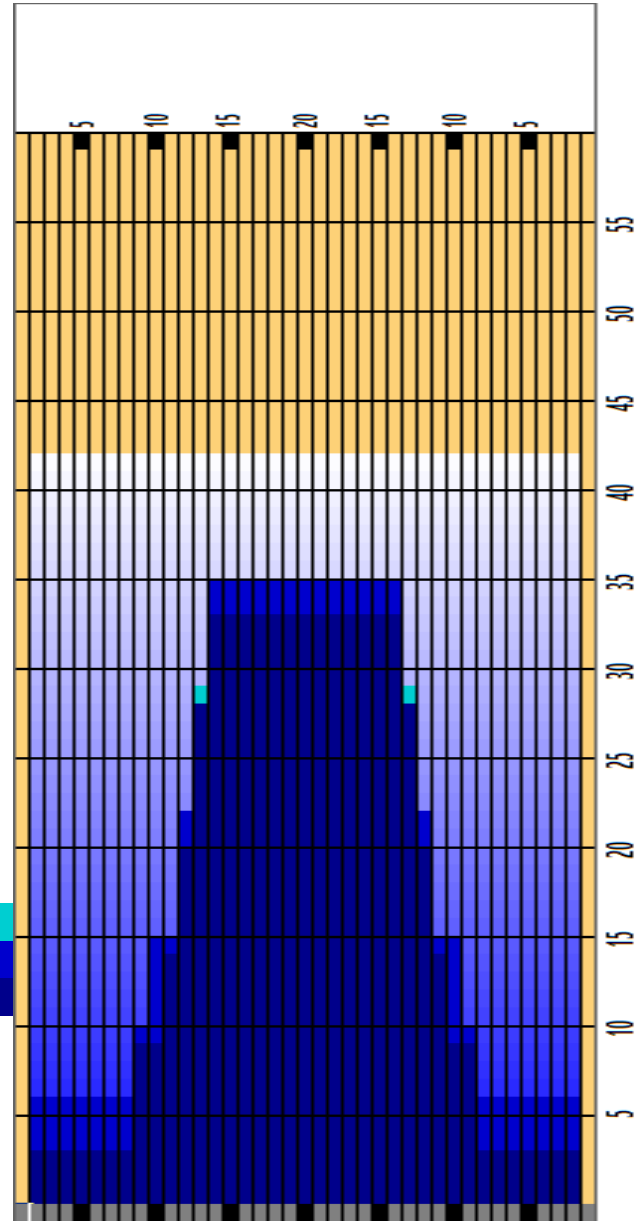

Cleaner Ratio Main Mix                      NA              Forward  
 Cleaner Ratio Back End Mix                NA              Reverse  
 Cleaner Ratio Back End Distance         NA              Combined



Buffer RPM: 4 = 720 | 3 = 500 | 2 = 200 | 1 = 50  
 Created by SWEBOWL TK 240702. For use in Swedish league 2024-25. Machines without db, uses db 42.

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside Track:Middle	Middle Track:Middle	Inside Track:Middle	Middle: Inside Track	Middle:Middle Track	Middle:Outside Track
Track Zone Ratio	6	2.4	1.03	1.03	2.4	6

